RADAR SPEED SIGN - CLASSIC



SPECIFICATIONS (STANDARD/ADVANCE MODEL)

- Full matrix SMD LED's with optical LEN's
- Pixel Pitch: P20
- Screen size: 480 x 480mm
- Screen resolution: 24 x 24 pixels
- Brightness: 6000 nits
- Brightness levels: 16 (automatic control)
- Power: 12V DC (240V AC version also available)
- Display different messages for speed areas (e.g. SLOW DOWN)
- Display simple graphics (e.g. SMILEY FACE)
- Communications by RS232 & Ethernet
- IP65 rated
- Weight: (standard kit may not include all items)
 - Cabinet (no battery) 18KG
 - Battery (per battery) 16KG
 - Solar Kit (bracket & panel) 22KG
 - Reflective Safety Panel 5KG

FEATURES

- · Vehicle activated
- Variable trigger speeds
- Variable over speed message
- Variable correct speed & image

ADDITIONAL SIGN OPTIONS

- Solar panel & Solar Charger
- Extra deep cycle battery

MODEL:SAS20-484-CLASSIC




RADAR DETECTION SPEED


DETECTION SPEED:

1) 11 - 160kph AGD RADAR (Radar Type: Advanced Pulsed FMCW)

2) 08 - 200kph AGD RADAR (Radar Type: CW Doppler Radar)

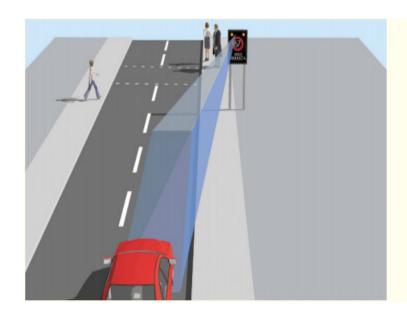



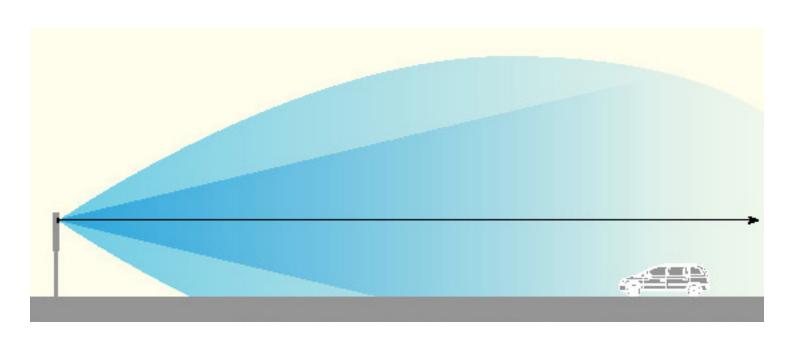



INSTALLATION OPTIONS

- Wall installation
- Post Installation
- Radar speed sign can be adapted for a custom installation

